

NMT-1
MULTI TESTER

- Patch cable tester
- DC cable tester
- Pedal Current & Voltage meter
- Tuner

4 in 1

Overview

NMT-1 is a 4-in-1 compact multi-tester that every valued guitarist should have one. It combines the function of patch cable tester, DC cable tester, pedal current meter and tuner. This will help a lot with your pedal board setups. Its built-in rechargeable Li-on battery allows you to use it wherever you go.


The cable tester function is avaliable for both 1/4" TS/TRS patch cables and 2.1mm DC cables. And you can charge it through the USB-C port. Its easy-to-take design is perfect for the last time cable checking before going to the gig.

Control panel

Front panel




Rear panel



1 LCD display	2 TESTER/TUNER button
3 DC cable jack	4 DC cable jack
5 1/4” (6.35mm) jack	6 1/4” (6.35mm) jack
7 DC IN jack	8 USB-C
9 DC OUT jack	

LCD display



1 Voltage display	2 Current display
3 Power display	4 Tuner display
5 DC cable display	6 Patch cable display

How to operate


Cable Tester

Long press the TESTER/TUNER button to power on.




Plug one end of the cable you want to test into NMT-1.

When the plug is ready, NMT-1 automatically detects the cable type and shows TS/TRS/DC CABLE on the display.

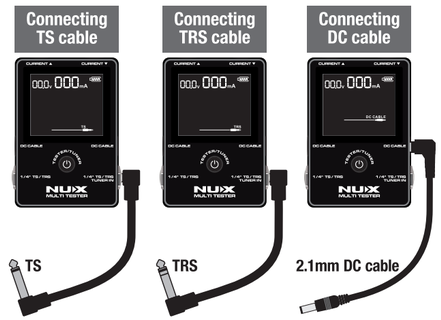

Plug the other end of the cable into NMT-1.

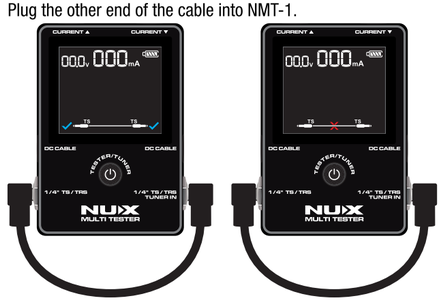

If the connection of the cable is good, it shows “✓”.


If it's not good, it shows “✕”.

Pedal Current & Voltage meter

Plug your pedal into NMT-1 and you'll know how much current it really needs and set your pedal accordingly. No need to source everywhere for current information about your pedals which you can not know whether is accurate.

Please note that the input voltage range of NMT-1 is 9-28V DC.

Plug the pedal's power supply to the DC IN jack on the top. The NMT-1 will detect and display the input voltage on the display.

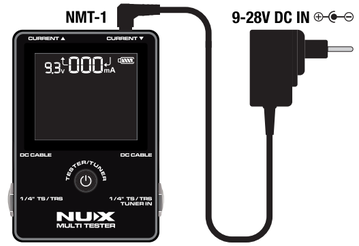

Plug the pedal you would like to test to the DC OUT jack on the top. As below picture shows, the exact how much current pedal consumes will be shown on the display.



*You can also plug the short DC cable into the daisy-chain cable from NMT-1 to measure the total current draw of your pedal board effects.

Tuner

NMT-1 also has a reliable tuner function. Its practical Chromatic tuning mode is perfect for musicians of all genres.

Long press the TESTER/TUNER button to power on.


Press the TESTER/TUNER button, switch to the tuner function.





Plug your guitar into the “TUNER IN” jacks of NMT-1.
Then simply start tuning!

Charge the NMT-1

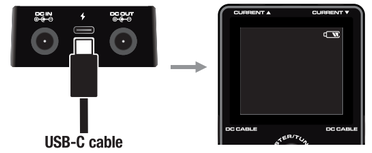

NMT-1 takes power from Li-on battery and can be charged through the USB-C port. You can use the included USB-C cable to connect your power supply.

A battery icon is shown in the display to indicate the current battery level and charging conditions.

Disclaimer

If the product is not used for a long time. Please be sure to charge the battery every 3 months to avoid the false fault of the lithium battery.

The false fault of the battery is not included in the 1-year warranty of the product.

Reset

In case of a system crash, please hold down this button with a paper clip or a SIM-eject tool to force this device to reboot.



Specifications

Pedal Current/Voltage Meter
- Input voltage range: 9-28V DC
- Max current displayed: 2A
- Protection:
  - -The over-voltage warning will be shown when the input voltage exceeds 30V.
  - -The over-current warning will be shown when the input current exceeds 2.1A.

Tuner
- Tuning range: A0(27.5Hz)-C8(4186.0Hz)
- Tuning mode: Chromatic
- Tuning accuracy: ±1 cent

Others
- Power: Built-in Li-on battery, charge through USB-C port
- Dimensions: 95mm(L) x 71mm(W) x 30mm(H)
- Weight: 125g

Accessories

- USB-C cable x 1
- 2.1mm DC cable x 1

*Specification may change without notice.

Warning

To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet general RF exposure statement. The device can be used in portable exposure condition without restriction.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

©Cherub Technology Co., Ltd.
All Rights Reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Cherub Technology Co., Ltd.

Made in China