
GP-100

MULTI-EFFECTS PROCESSOR

Firmware Update Guide

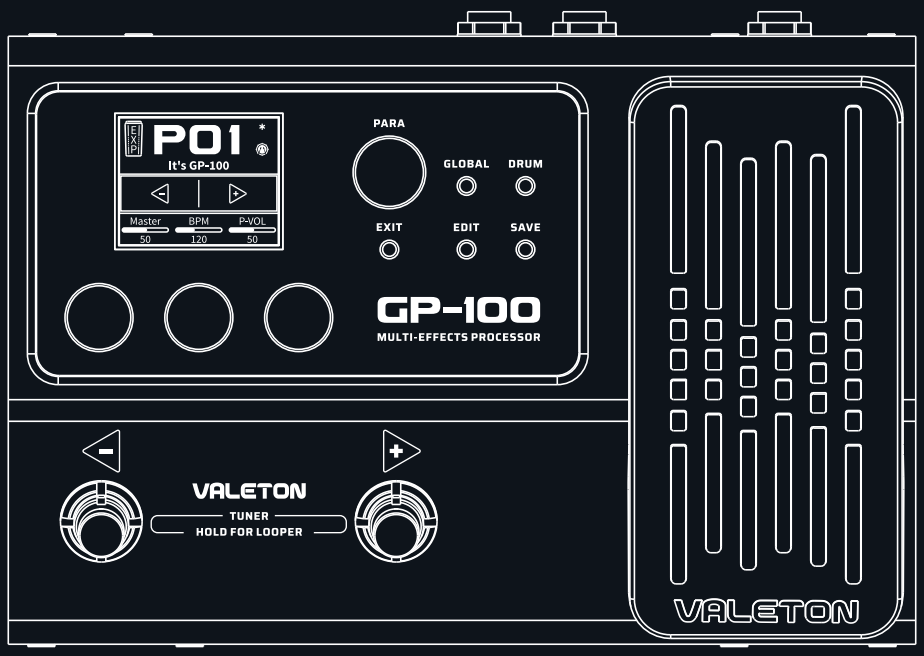

VALETON

The contents of this manual are subject to change without notice.

Before

In order to optimize unit performance and fix bugs (please see update notes for details), we recommend all GP-100 users to upgrade in time to get the best user experience. Be sure to update with latest GP-100 software.

How To Update The Firmware


1. Download new firmware and software file from Valeton (www.valeton.net):
Go to our official website and click “Support” - “Firmware” or “Software” option, download the latest firmware and the latest software.
2. Unzip the downloaded firmware package (the firmware file should be a .bin file).
3. Run GP-100 software setup to install the new software.
4. Connect your GP-100 to the computer with a USB cable. A “Device Connected” message will be appear on the computer screen and enter the GP-100 software interface:





If you cannot access the software edit interface after a long time, please restart the GP-100 and software.

5. Click the button (Settings) in the top right corner of the GP-100 software, click Update Firmware option.

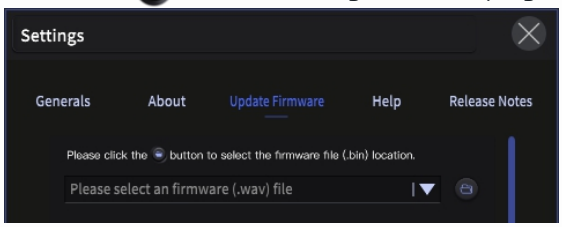

6. Click the button, browse and choose your firmware file in pop-up, then click the “update firmware” button, the firmware update progress will begin automatically.
7. A progress bar will appear on the computer screen to indicate updating progress.
8. When the firmware upgrade progress reaches 100%, the progress bar will disappear, then a “No Device connected” message will appear on the computer screen. This indicate update progress completed. After that, just restart your GP-100 and enjoy the changes brought by the new firmware.

Other methods to update

Note: If your device cannot enter the GP-100 software interface normally, try the following methods.

1. Disconnect the power supply while keeping USB connection.
2. Hold the 2 footswitches along with the PARA Knob, and connect the power supply.



3. Launch GP-100 software and click “Update” button. Browse and choose your firmware file.
Wait till it is finished, restart your GP-100, and DONE!

